

LCD Series

V-SHAPED DRY COOLERS

- ▶ HIGH-CAPACITY MICROCHANNEL HEAT EXCHANGERS
- ▶ HIGH HEAT REJECTION DENSITY
- ▶ EFFICIENT EC-MOTOR FANS



TECHNICAL MANUAL
ENGLISH


100-650kW



MODEL IDENTIFICATION

LCD			MC	V	2	.	1	-	E	80	-	2	-	3	/	N	-	1
Heat exchanger type	MC	Microchannel aluminium coil																
Unit shape	V	V-shaped																
Number of coils																		
Number of passes																		
Fan motor type	E	EC-motor																
	A	AC-motor																
Fan diameter		cm																
Number of fans																		
Power supply	1	230V/1Ph/50Hz																
	3	400V/3Ph/50Hz																
Noise level	N	Normal																
	L	Low																
	U	Ultra-low																
Number of circuits																		

The model code can be found on the name plate under the front cover of the unit (unit connection side):



Kaltra Innovativtechnik GmbH
 Max-Reger-Str. 44
 90571 Schwaig
 Germany
 Tel.: +49 (0) 911 715 320 21
 Email: info@kaltra.de


UNIT SERIES
LCD


MODEL
MCV 2.1-E80-2-3/N-1

Supply voltage	[V/Ph/Hz]	400/3/50
Absorbed current [FLA]	[A]	4.86
Fluid volume	[L]	8.9

Serial number M18-00648
 Year of manufacturing 2018

Made in EU



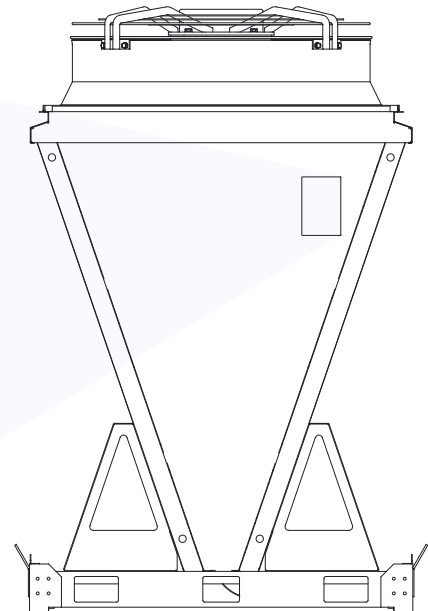

UNIT COMPONENTS AND CONSTRUCTION

Painted Galvanized Steel Enclosure

The unit shall be coated with epoxy baked powder paint to provide a durable finish. The paint color shall be Signal White (RAL 9003) or similar.

Electronically Commutated (EC) Fan Motor

The fans shall incorporate external EC rotor motor technology to provide highly accurate discreet speed control. The fans offer maximum airflow performance while keeping sound levels to a minimum.

Each fan shall incorporate electronically commutated DC motor control using semiconductor modules responding to a signal from the indoor unit or an independent control module for standalone units.

Microchannel Heat Exchanger

Large surface area heat exchanger positioned to optimise airflow and heat transfer, shall be manufactured from microchannel coil with multi-port flat tubes and louvered fins, optionally epoxy coated. The factory test pressure shall not be less than 45 bar.

Electrical Components and Wiring - Optional

All electrical components shall be rated for all year round outdoor use. All wiring (optional) shall be color coded and numbered for identification. All units shall be wired in accordance with current European standards.

Main Electric Isolator - Optional

A weatherproof mains isolator shall be fitted to ensure complete unit isolation of the electrical panel during adjustment and maintenance.

Coil Guard - Optional

Protective mesh guards can be fitted to each of the outer coils to protect against damage and shall be removable.

Air Filtration - Optional

The air filtration media shall be heavy duty commercial grade polycarbonate that can be removed for maintenance purposes.

Epoxy Coating - Optional

Epoxy electrocoated microchannel heat exchanger offers the ultimate corrosion and chemical resistance, provide excellent salt spray and humidity resistance and exhibit outstanding performance over aluminium.

Shut-off Valves - Optional

The unit can be fitted with shut-off valves on liquid and discharge lines.

Discharge Air Plenum - Optional

Factory fitted, constructed from galvanized sheet steel and coated with epoxy baked powder paint, this plenum shall direct discharge air vertically which reduces air recirculation and provides a degree of acoustic reduction in the horizontal plane.

Fan Diffusers - Optional

Factory fitted fan diffusers to boost fan efficiency and reduce the operating noise of the unit.

Variable Speed Control - Optional

The fan speed is controlled via alteration of the supply voltage which corresponds to a particular condensing pressure. The pressure set point corresponding to the maximum output voltage can be adjusted by means of a potentiometer internal to the case of the controller.

Adiabatic spray system - Optional

Direct adiabatic water spray system to provide adiabatic cooling effect via intermittent water spray on incoming air stream of unit's heat exchangers.

Unit model	NORMAL NOISE LEVEL	LOW NOISE LEVEL	ULTRA-LOW NOISE LEVEL	HIGH-PERFORMANCE FANS
Painted galvanized steel enclosure	■	■	■	■
Electronically commutated (EC) fan motors	■	■	■	■
Microchannel heat exchanger	■	■	■	■
Schraeder valves on liquid/discharge lines	■	■	■	■
Electrical components and wiring	□	□	□	□
Main electric isolator	□	□	□	□
Coil guard	□	□	□	□
Air filtration	□	□	□	□
Coil epoxy coating	□	□	□	□
Shut-off valves (loose)	□	□	□	□
Discharge air plenum	□	□	□	□
Fan diffusers	-	-	-	■
Variable speed control w/ Modbus	□	□	□	□
Adiabatic spray system	□	□	□	□

- Standard features
- Optional features
- Feature not available

TECHNICAL DATA - NORMAL NOISE LEVEL

LCD Series		MCV 2.1-E80-2-3/N-1	MCV 4.1-E80-4-3/N-1	MCV 6.1-E80-6-3/N-1	MCV 8.1-E80-8-3/N-1
Performance					
Heat rejection	kW	138.8	277.6	416.4	555.2
Waterside pressure drop	kPa	14.7	14.7	14.7	14.7
Dimensions					
Length	mm	1125	2165	3205	4245
Width	mm	2350	2350	2350	2350
Height	mm	1640	1640	1640	1640
Heat exchanger(s)					
Quantity		2	4	6	8
Face area	m ²	4.52	9.04	13.57	18.09
Coil volume	L	12.4	24.8	37.2	49.6
Inlet air velocity	m/s	2.5	2.5	2.5	2.5
No. of circuits		2	2	2	2
Fan(s) - EC-type					
Quantity		2	4	6	2
Diameter	mm	800	800	800	800
Airflow - total	m ³ /s	40000	80000	120000	160000
Rotation speed	RPM	930	930	930	930
Motor size	kW	1.95	1.95	1.95	1.95
Sound					
Sound power	dB(A)	79	79	79	79
Sound pressure level @ 10m	dB(A)	51	51	51	51
Electrical					
Mains supply		400V/3Ph/50Hz	400V/3Ph/50Hz	400V/3Ph/50Hz	400V/3Ph/50Hz
Power input - total	kW	3.12	6.24	9.35	12.47
Current - total	A	4.9	9.7	14.6	19.4

Water inlet/outlet temperatures: 40/35°C; Fluid: 100% water; Ambient temperature: 25°C; Air humidity: 50%

TECHNICAL DATA - LOW NOISE LEVEL

LCD Series		MCV 2.1-E80-2-3/L-1	MCV 4.1-E80-4-3/L-1	MCV 6.1-E80-6-3/L-1	MCV 8.1-E80-8-3/L-1
Performance					
Heat rejection	kW	114.6	229.2	343.8	458.4
Refrigerant pressure drop	kPa	12.1	12.1	12.1	12.1
Dimensions					
Length	mm	1125	2165	3205	4245
Width	mm	2350	2350	2350	2350
Height	mm	1640	1640	1640	1640
Heat exchanger(s)					
Quantity		2	4	6	8
Face area	m ²	4.52	9.04	13.57	18.09
Coil volume	L	12.4	24.8	37.2	49.6
Inlet air velocity	m/s	2.0	2.0	2.0	2.0
No. of circuits		2	2	2	2
Fan(s) - EC-type					
Quantity		2	4	6	2
Diameter	mm	800	800	800	800
Airflow - total	m ³ /s	32000	64000	96000	128000
Rotation speed	RPM	760	760	760	760
Motor size	kW	1.95	1.95	1.95	1.95
Sound					
Sound power	dB(A)	73	73	73	73
Sound pressure level @ 10m	dB(A)	45	45	45	45
Electrical					
Mains supply		400V/3Ph/50Hz	400V/3Ph/50Hz	400V/3Ph/50Hz	400V/3Ph/50Hz
Power input - total	kW	1.69	3.38	5.07	6.76
Current - total	A	2.8	5.6	8.5	11.3

Water inlet/outlet temperatures: 40/35°C; Fluid: 100% water; Ambient temperature: 25°C; Air humidity: 50%

TECHNICAL DATA - ULTRA-LOW NOISE LEVEL

LCD Series		MCV 2.1-E80-2-3/U-1	MCV 4.1-E80-4-3/U-1	MCV 6.1-E80-6-3/U-1	MCV 8.1-E80-8-3/U-1
Performance					
Heat rejection	kW	89.2	178.4	267.6	356.8
Refrigerant pressure drop	kPa	9.5	9.5	9.5	9.5
Dimensions					
Length	mm	1125	2165	3205	4245
Width	mm	2350	2350	2350	2350
Height	mm	1640	1640	1640	1640
Heat exchanger(s)					
Quantity		2	4	6	8
Face area	m ²	4.52	9.04	13.57	18.09
Coil volume	L	12.4	24.8	37.2	49.6
Inlet air velocity	m/s	1.5	1.5	1.5	1.5
No. of circuits		2	2	2	2
Fan(s) - EC-type					
Quantity		2	4	6	2
Diameter	mm	800	800	800	800
Airflow - total	m ³ /s	24000	48000	72000	96000
Rotation speed	RPM	580	580	580	580
Motor size	kW	0.83	0.83	0.83	0.83
Sound					
Sound power	dB(A)	67	67	67	67
Sound pressure level @ 10m	dB(A)	39	39	39	39
Electrical					
Mains supply		400V/3Ph/50Hz	400V/3Ph/50Hz	400V/3Ph/50Hz	400V/3Ph/50Hz
Power input - total	kW	0.82	1.64	2.46	3.28
Current - total	A	1.6	3.1	4.7	6.2




Water inlet/outlet temperatures: 40/35°C; Fluid: 100% water; Ambient temperature: 25°C; Air humidity: 50%

TECHNICAL DATA - NORMAL NOISE LEVEL / HIGH-PERFORMANCE FANS




LCD Series		MCV 2.1-E80-2-3/N-1	MCV 4.1-E80-4-3/N-1	MCV 6.1-E80-6-3/N-1	MCV 8.1-E80-8-3/N-1
Performance					
Heat rejection	kW	161.6	323.2	484.8	646.4
Refrigerant pressure drop	kPa	17.4	17.4	17.4	17.4
Dimensions					
Length	mm	1125	2165	3205	4245
Width	mm	2350	2350	2350	2350
Height	mm	1640	1640	1640	1640
Heat exchanger(s)					
Quantity		2	4	6	8
Face area	m ²	4.52	9.04	13.57	18.09
Coil volume	L	12.4	24.8	37.2	49.6
Inlet air velocity	m/s	3.0	3.0	3.0	3.0
No. of circuits		2	2	2	2
Fan(s) - EC-type w/ diffusers					
Quantity		2	4	6	2
Diameter	mm	800	800	800	800
Airflow - total	m ³ /s	48000	96000	144000	192000
Rotation speed	RPM	1050	1050	1050	1050
Motor size	kW	2.80	2.80	2.80	2.80
Sound					
Sound power	dB(A)	80	80	80	80
Sound pressure level @ 10m	dB(A)	52	52	52	52
Electrical					
Mains supply		400V/3Ph/50Hz	400V/3Ph/50Hz	400V/3Ph/50Hz	400V/3Ph/50Hz
Power input - total	kW	4.17	8.33	12.50	16.66
Current - total	A	6.4	12.8	19.3	25.7

Water inlet/outlet temperatures: 40/35°C; Fluid: 100% water; Ambient temperature: 25°C; Air humidity: 50%




DRAWINGS - UNIT MODELS MCV 2

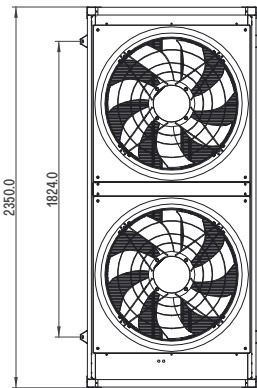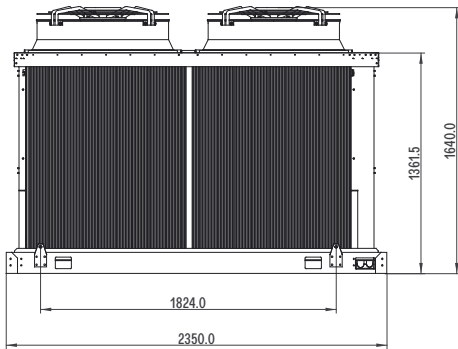




DRAWINGS - UNIT MODELS MCV 4

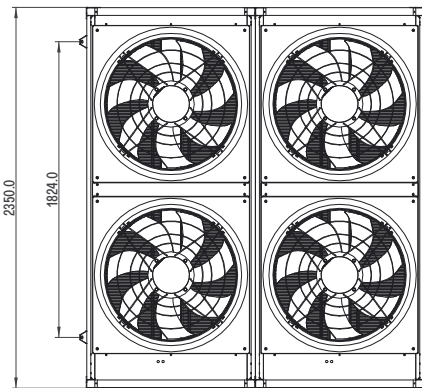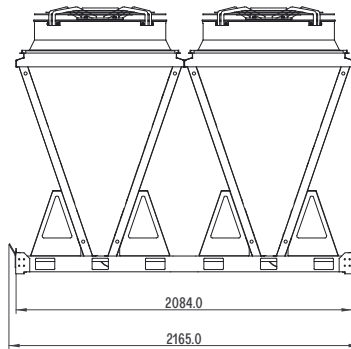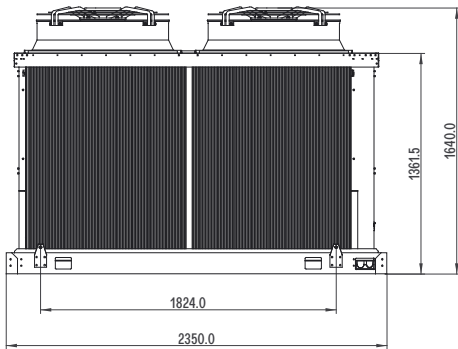

DRAWINGS - UNIT MODELS MCV 6

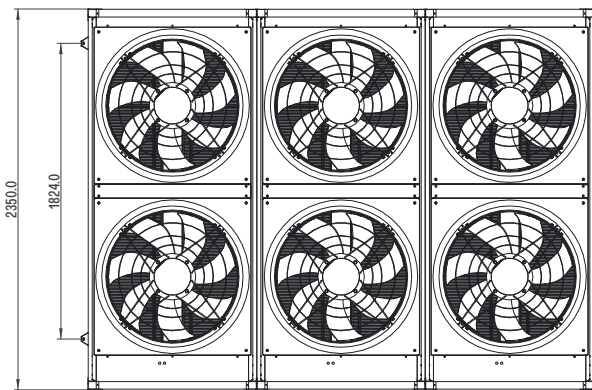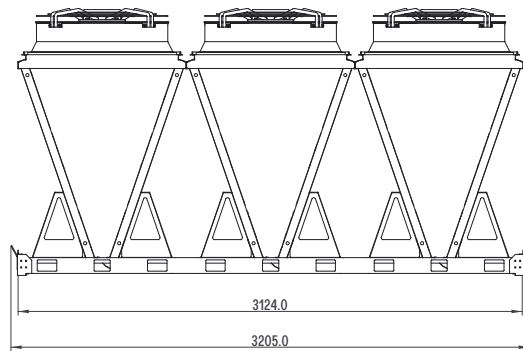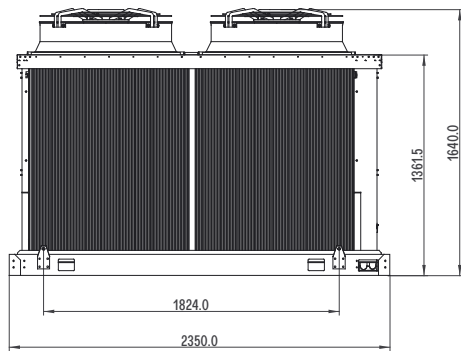

DRAWINGS - UNIT MODELS MCV 8

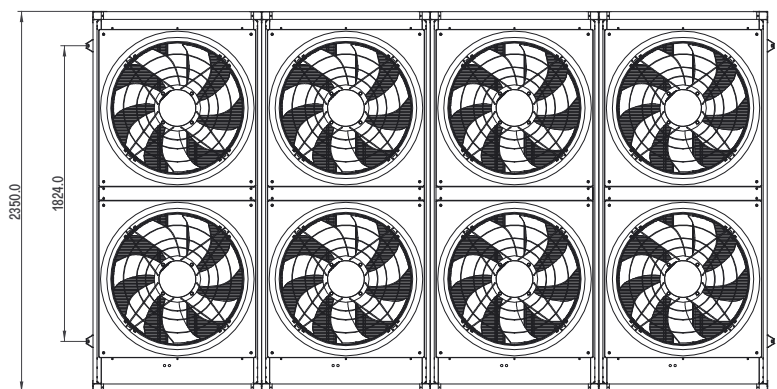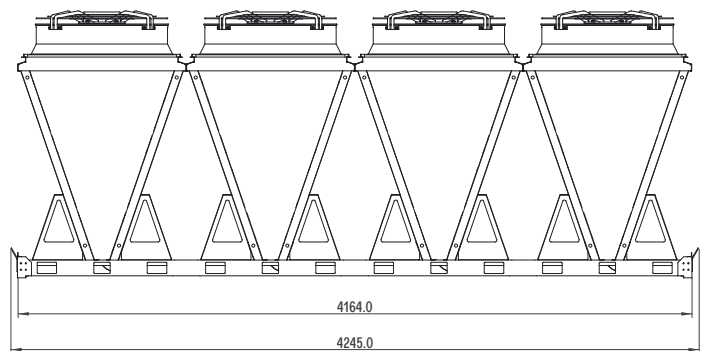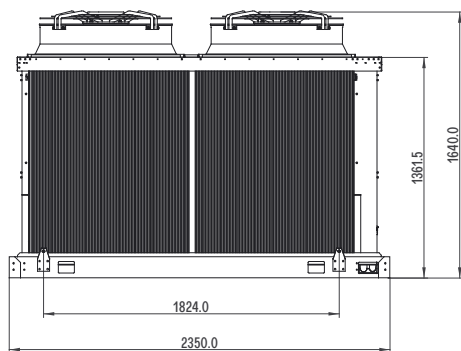



Kaltra Innovativtechnik GmbH

Head office:

Max-Reger-Str. 44
90571 Schwaig
Germany



+49(0)911 715 32021



info@kaltra.de



www.kaltra.com

